

# HS-BE Connection Enclosure




## Typical Applications

- For use in conditions where for health and safety, guarding etc., a reading is required to be taken with a portable data-collector. The BE Series provides a common point to terminate up to four accelerometers. The power for the sensors comes from the data-collector.
- **Protecting...**
  - Fans, Motors, Pumps, Machines, Air Handling Units, Machine Tools, etc.

## Technical Performance

Inputs	Accelerometer, 4 ways
Output	AC BNC standard with dust covers TNC optional
Enclosure	Polycarbonate grey
Sealing	IP55
Door	Hinged
Termination	Klippon type
Glanding	Boxes fitted with glands to suit max. cable diameter of 5.0 mm
Labelling	Channel locations
Size	125 x 125 x 100 mm
Mounting	110 x 140 mm, 4 x holes, diameter 5.0 mm (mounting drgs available on request)

## How to order

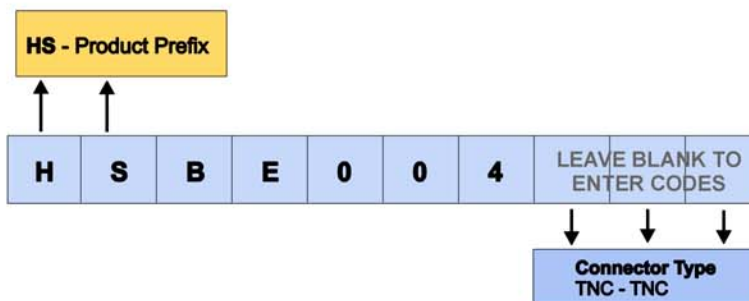

We reserve the right to alter the specification of this product without prior notice.

TS046 Iss01