

HS-422T Series Vibration Sensor

PUR Cable, Dual Output - 4-20mA and Temperature, 10mV/°C



Typical Applications

- Low cost online means of monitoring with the capability of interfacing direct into PLC, BMS or any 4-20mA input module. Proven use in vibration monitoring for offline applications using commercially available data collectors.
- **Protecting...**
Fans, Motors, Pumps, Compressors, Centrifuges, Conveyers, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, HVAC, Spindles, Machine Tooling, Process Equipment and many more.

Technical Performance

Mounted Base Resonance	5 kHz min.
Velocity Ranges	0-10 to 0-100 mm/sec RMS $\pm 10\%$ Nominal 80 Hz at 22°C
Frequency Response	10 Hz to 5 kHz $\pm 5\%$ - ISO10816
Isolation	Base isolated
Measurement Range	50 g peak
Temperature Output	PT100 (100 Ohms)
Transverse Sensitivity	Less than 5%

Electrical

Output - Velocity	4-20 mA DC proportional to RMS Velocity Range
- Temperature	0-1 V proportional to 0-100 °C (To convert this to 4-20 mA use HS-540 Module)
Supply Voltage	15 - 30 Volts DC (for 4-20 mA)
Settling Time	2 seconds
Output Impedance	Loop Resistance 600 Ohms max. at 24 Volts
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental


Operating Temperature Range	-25 to 90 °C
Sealing	IP68
Maximum Shock	5000 g
Emissions	EN61000-6-4:2007
Immunity	EN61000-6-2:2005

Mechanical


Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	8 Nm
Weight	150 gms (nom)
Maximum Cable Length	1000 metres
Cable	Blue PUR Cable
Options	Ranges, connector, other cable lengths

HS-422T Series Vibration Sensor


Dimensions

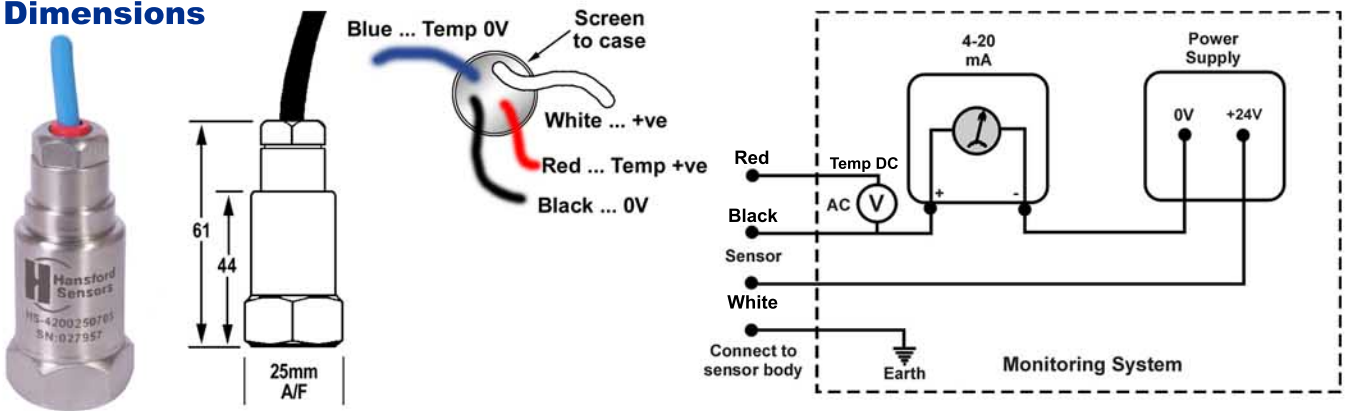


Frequency Response

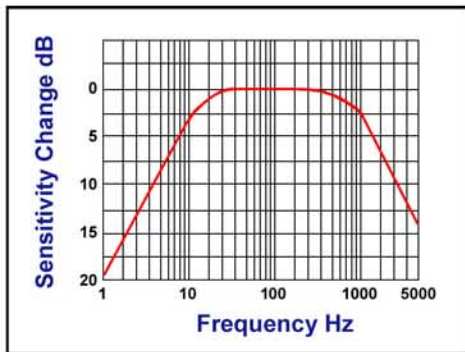

Mounting of sensor to achieve good repeatable readings. Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How to order

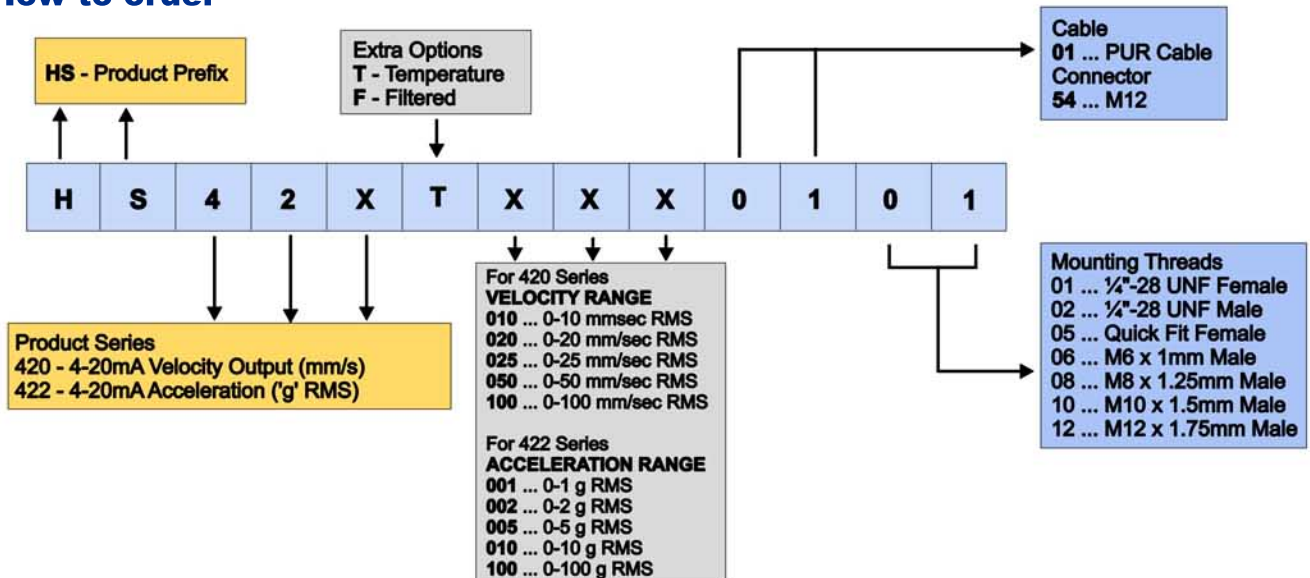

Please contact our Sales Office for information on sensor accessories (mounting studs, etc) and multichannel switch boxes.