


1 2 3 4 5 6 7 8

111.00

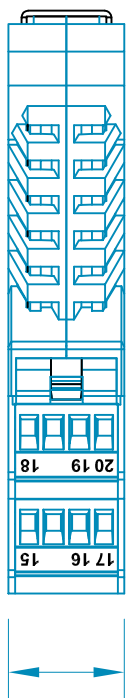


22.60


Terminal Connections

- 1 - 0V Power Input
- 2 - +24V Power Input
- 3 - HS-420 (White)
- 4 - 0V In (0-10Vdc)
- 5 - +Vin or HS-420 (Black)
- 6 - No Connection
- 10 - Output -mA
- 12 - Output +mA
- 15 - Relay 1 Closed on Alarm
- 16 - Relay 1 Open on Alarm
- 17 - Relay 1 Common
- 18 - Relay 2 Closed on Alarm
- 19 - Relay 2 Open on Alarm
- 20 - Relay 2 Common

35.00

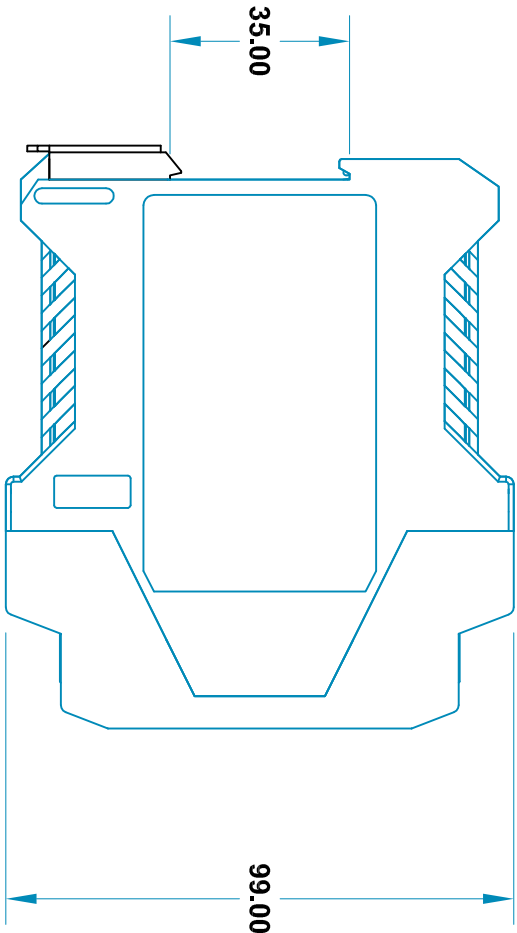

99.00

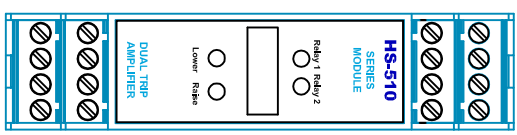

Rev No	DRF No	Date Drg	Drg By	Appd By	Material: N/A
A	Release	03/01/17	MJS	MJS	



Hansford Sensors Ltd
Artisan, Hillbottom Road
Sands Industrial Estate
High Wycombe
Bucks HP12 4HJ

Description: HS-510 Dimensional Drawing

Tolerances Unless Stated	0 or 0.0	±0.5	1/8" Finish All Over
0.00	±0.15		Threads g6 H6
Angle	±5°		

Do Not Scale

Drawing No: CD167

All Dimensions in mm Unless Otherwise Stated

If In Doubt - Ask!

Scale: 2 : 1
Form Number: QF024 Issue 3

1 2 3 4 5 6 7 8