


# HS-550 Vibration Module

Acceleration Power Supply and Signal Amplifier

## Key Features

- Provides power for constant current accelerometers
- 3 Gain Settings
- TDX OK Indicator
- DIN Rail Mounted

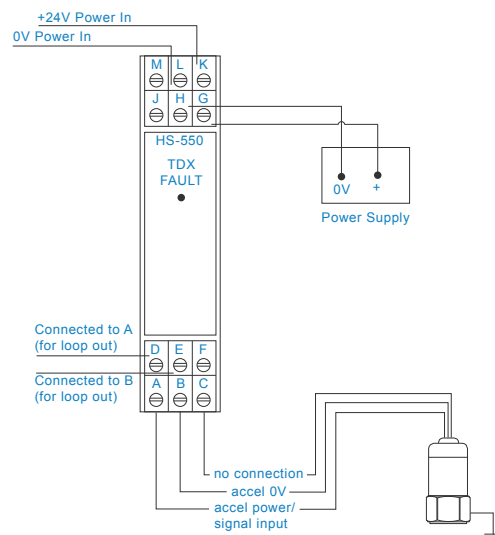

## Technical Performance

Power Input	24 VDC $\pm 10\%$ @ 20 mA max.
Accelerometer Driving Voltage	22.5 VDC
Accelerometer Constant Current	4 mA or 10 mA selectable via link
Maximum Output	$\pm 9$ V at x1 gain $\pm 5$ V at 10 gain $\pm 4.5$ V at x100 gain
Voltage Gain	x1, x10, x100 selectable via DIL switch

## Mechanical

Case Material	Plastic
Mounting	DIN Rail TS35 (Top Hat)
Dimensions	4 x 3 x 1 in (HxDxW)
Connections	Screw Clamp
Conductor Size	0.02 to 0.2 in
Weight	2.7 oz. (nom)

## Electrical

Frequency Response	1 Hz to 120 KHz -3db at x1 gain 1 Hz to 50 KHz -3db at x10 gain 1 Hz to 10 KHz -3db at 100 gain
Broadband Noise (1-10 KHz)	70 $\mu$ V rms at x1 gain 650 $\mu$ V rms at x10 gain 3 mV rms at x100 gain
Fault Indication	Red LED 5 V > Vbias > 15 V

## Environmental

Operating Temperature Range	32 to 131°F
EMC	EN61326-1:2013
Installation Category (IEC664)	II
Equipment Class (IEC536)	III



[www.hansfordsensors.com](http://www.hansfordsensors.com)  
[sales@hansfordsensors.com](mailto:sales@hansfordsensors.com)

We reserve the right to alter the specification of this product without prior notice  
TS054U.2

