


HS-SE Switching Enclosure

Stainless Steel

Key Features

- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via one connector

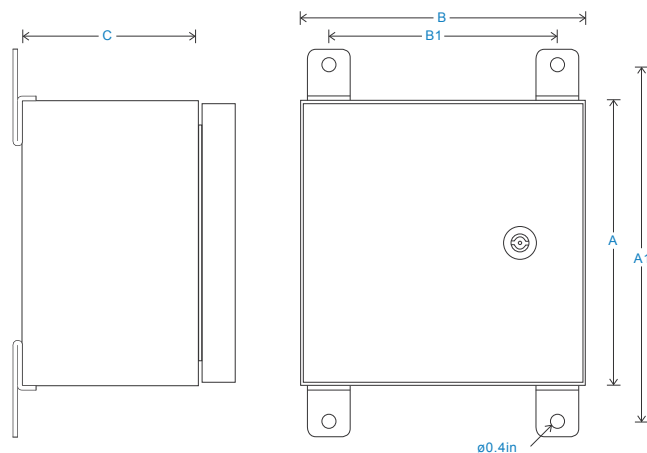


dimensions to be specified in 'how to order' table

Technical Performance

| | | | |
|----------------|--|-----------|---|
| Inputs | Via accelerometer | Door | Lock and polyamide key |
| Output | BNC as standard (alternatives can be specified in 'How To Order' table) | Glanding | Glands supplied but not fitted |
| Mounting Board | Engraved traffolyte panel (customisable upon request) | | Holes are punched for: Single input M12 - ø0.1-0.3in cable Single input M20 - ø0.3-0.7in multi-core cable Multi input M20 - 3 x ø0.2in |
| Material | 304 Stainless Steel (to be specified in options of 'How To Order' table) | Labelling | Channel locations - other labelling available upon request |
| Dimensions | see: 'How To Order' table | Mounting | supplied are 4 x Brackets |
| Sealing | NEMA 4X | EMC | EN61326-1:2013 |
| Termination | Din rail terminals wired to switch | | |

How To Order

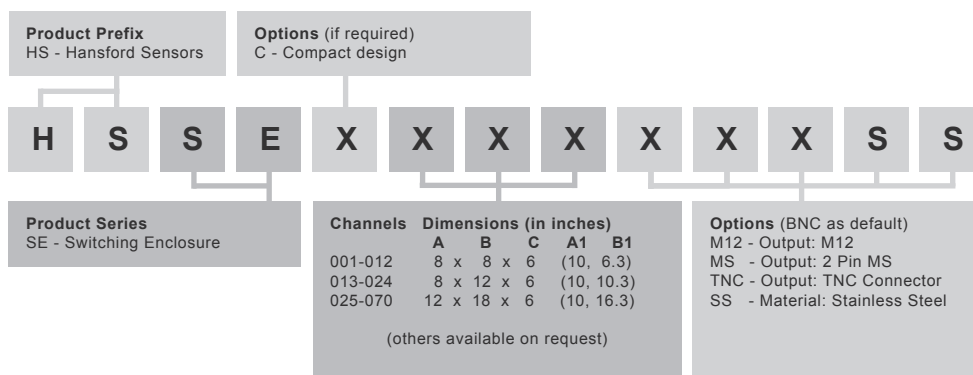

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice
 TS059U.2

