


HS-580 Module Enclosure

Polycarbonate

Key Features

- Isolated Mains Power Supply
- For use with all HS-500 Series
- Short Circuit Protected
- Safety to UL1310 Class II

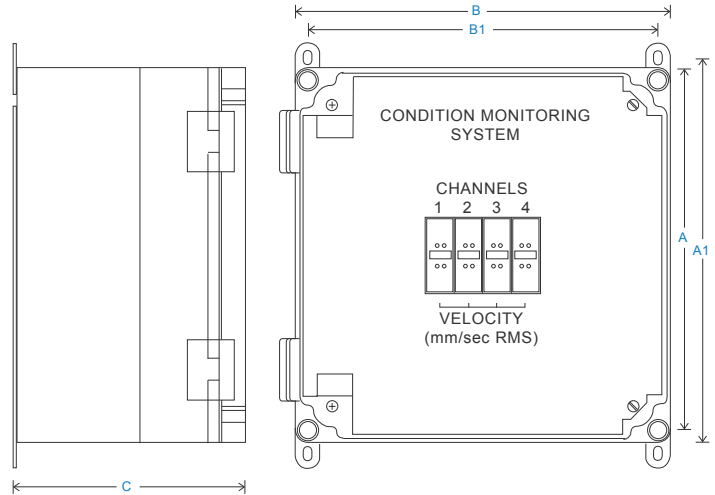


Technical Performance

| | |
|----------------------|---------------------------|
| Input Voltage Range | 85 to 260 VAC |
| Output Voltage Range | 24 VDC |
| Output Power | 2 Amps |
| Case Material | Polycarbonate |
| Mounting | DIN Rail TS35 (Top Hat) |
| Dimensions | see: 'How To Order' table |
| Connections | Screw Clamp |
| Conductor Size | 0.5 to 4.0mm |
| Weight | 260gms (nominal) |

Environmental

| | |
|--------------------------------|-----------------------|
| Operating Temperature Range | 0 to 55°C |
| Sealing | IP66 (excluding fans) |
| Cooling | Two fans |
| Relative Humidity | 20 to 90% RH |
| EMC | EN61326-1:2013 |
| Installation Category (IEC664) | II |
| Equipment Class (IEC536) | III |

How To Order

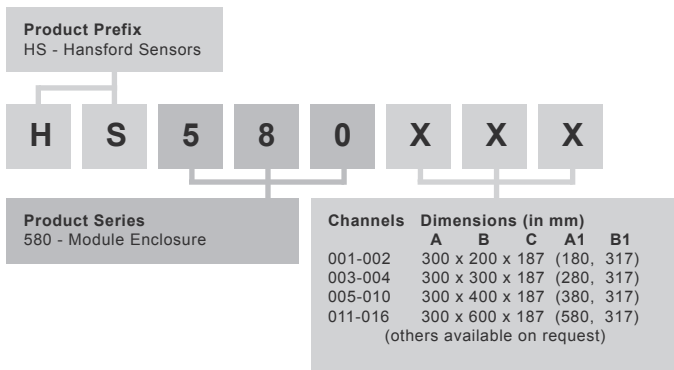

Accessories

- HS-590 - Flashing Beacon & Siren Module
- HS-591 - Flashing Beacon
- HS-592 - Siren Module



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice
TS109.4

