
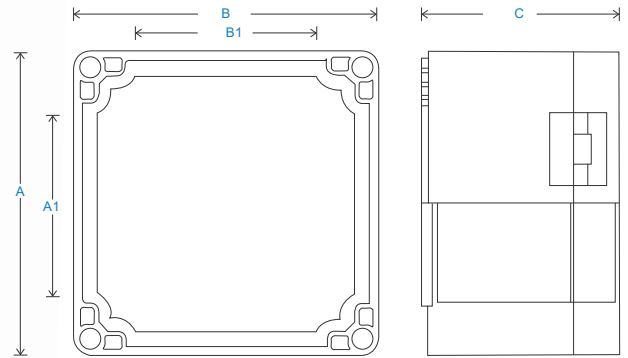


HS-SE Switching Enclosure

Polycarbonate

Key Features


- BNC and 2 Pin MS Output
- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via one connector
- Easy to install

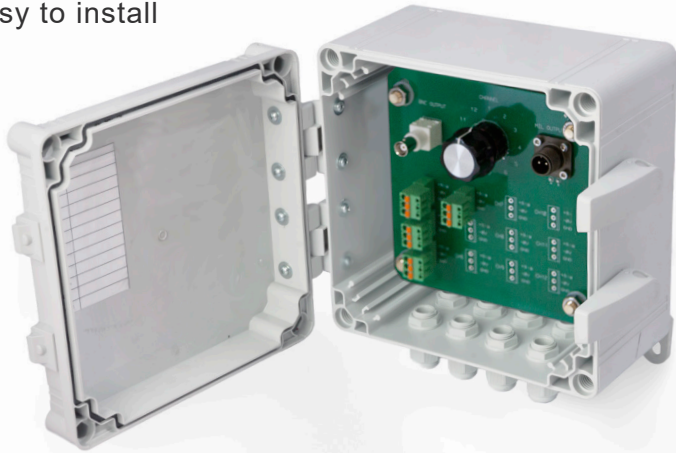

Technical Performance

Inputs	Via accelerometer	Door	Catches
Output	BNC and 2 Pin MS as standard	Glanding	Glands supplied but not fitted
Mounting Board	PCB Panel (customisable upon request)		Holes are punched for: Single input M12 - \varnothing 0.1-0.3in cable Single input M20 - \varnothing 0.3-0.7in multi-core cable Multi input M20 - 3 x \varnothing 0.2in
Material	Polycarbonate (to be specified in options of 'How To Order' table)	Labelling	Channel locations - other labelling available upon request
Dimensions	see: 'How To Order' table	Mounting	supplied are 4 x Brackets
Sealing	IP66	EMC	EN61326-1:2013
Termination	Spring-loaded terminal		

How To Order

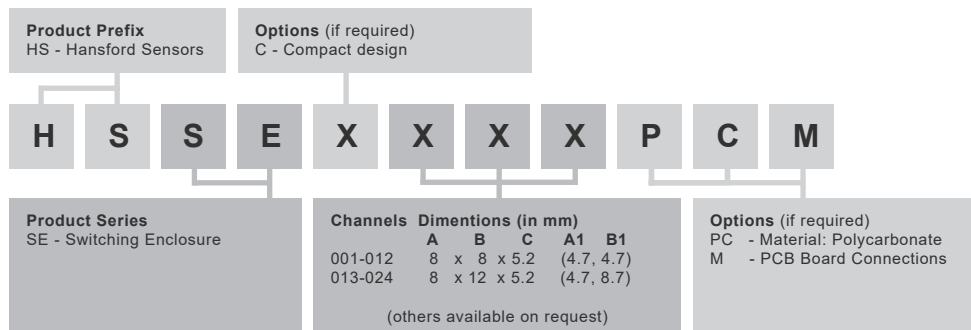

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice
TS149U.3

