


HS-SEC Compact Switching Enclosure

Stainless Steel

Key Features


- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via one connector
- Compact design

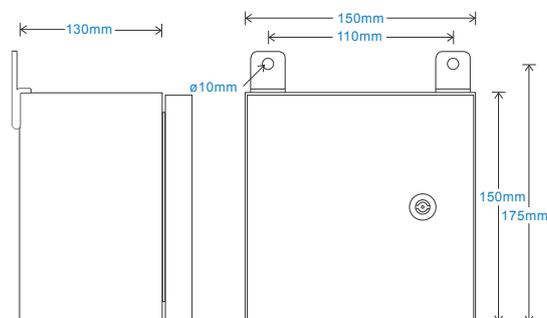

Technical Performance

Inputs	Via accelerometer	Door	Twist Handle
Output	BNC as standard (alternatives can be specified in 'How To Order' table)	Glanding	Glands supplied but not fitted
Mounting Board	Engraved traffolyte panel (customisable upon request)		Holes are punched for:
Material	304 Stainless Steel (to be specified in options of 'How To Order' table)		Single input M12 - \varnothing 3.5-7mm cable
Dimensions	see: 'How To Order' table		Single input M20 - \varnothing 7-13mm multi-core cable
Sealing	IP66	Labelling	Multi input M20 - 3 x \varnothing 5.3mm
Termination	Din rail terminals wired to switch	Mounting	Channel locations - other labelling available upon request
		EMC	supplied are 2 x Brackets
			EN61326-1:2013

How To Order

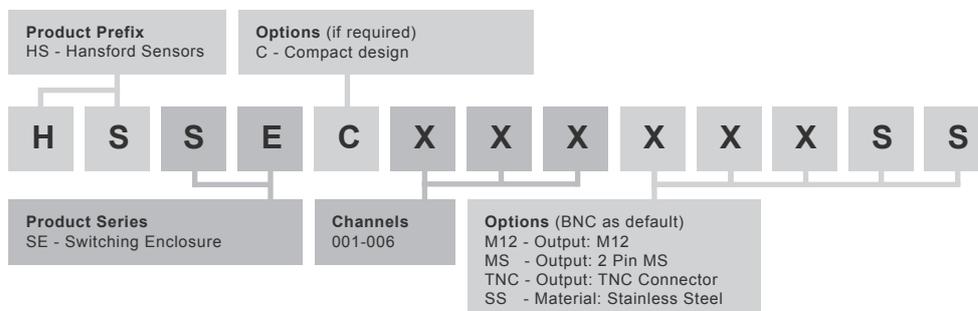

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice
 TS242.5

