


AC acceleration output via PUR Cable

- Waterproof
- Resistant to oil
- Premium design

Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical


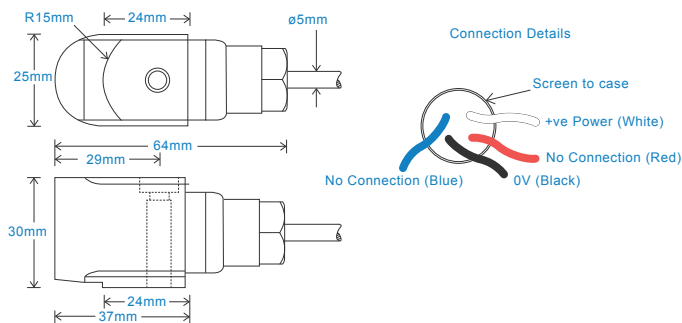


Technical Performance		Mechanical	
Mounted Base Resonance	see 'How To Order' table (nominal)	Case Material	Stainless Steel
Sensitivity	see: 'How To Order' table $\pm 10\%$	Sensing Element/Construction	PZT/Shear
	Nominal 80Hz at 22°C	Mounting Torque	8Nm
Frequency Response	1.5Hz (90cpm) to 10kHz (600kcpm) $\pm 5\%$	Mounting Bolt provided	see: 'How To Order' table x 35mm long
	0.5Hz (30cpm) to 12kHz (720kcpm) $\pm 10\%$	Weight	205gms (nominal)
	0.2Hz (12cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$	Maximum Cable Length	1000 metres
Isolation	Base isolated	Standard Cable Length	5 metres
Range	see: 'How To Order' table	Screened Cable	PUR - length to be specified with order
Transverse Sensitivity	Less than 5%	Mounting Threads	see: 'How To Order' table
		Submersible Depth	100 metres max (10 bar)

Electrical		Environmental	
Electrical Noise	0.1mg max	Operating Temperature Range	-30 to 90°C
Current Range	0.5mA to 8mA	Sealing	IP68
Bias Voltage	10 - 12 Volts DC	Maximum Shock	5000g
Settling Time	1 second	EMC	EN61326-1:2013
Output Impedance	200 Ohms max.		
Case Isolation	>10 ⁸ Ohms at 500 Volts		

The graph shows the sensitivity change percentage as a function of frequency for a system with a natural frequency of 100 Hz. The x-axis is logarithmic, ranging from 0 to 10,000 Hz. The y-axis ranges from -50% to 50%. The curve starts at 0% for low frequencies, drops sharply at 100 Hz to about -45%, and then gradually returns to 0% as frequency increases towards 10,000 Hz.

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

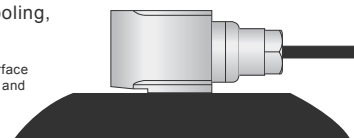

Product Prefix HS - Hansford Sensors		Product Series 150 - Premium Industrial Vibration Sensor					Cable Length (if integral cable) QXX - length specified in metres							
H	S	1	5	0	S	X	X	X	X	X	X	X	X	X
Extra Options (if required) F - Filtered L - 316L Stainless Steel RT - Temperature Output PT100 S - 90° Side Exit T - Temperature Output Y - 5% tolerance on sensitivity		Sensitivity 010 - 10mV/g 030 - 30mV/g 050 - 50mV/g 100 - 100mV/g 250 - 250mV/g 500 - 500mV/g		Range ±800g ±250g ±160g ±80g ±32g ±16g		Resonant Frequency 27kHz (1,620kcpm) 25kHz (1,500kcpm) 23kHz (1,380kcpm) 21kHz (1,260kcpm) 19kHz (1,140kcpm) 17kHz (1,020kcpm)		Cable/Connector 01 - PUR 02 - Braided 07 - Silicon 08 - Flame Retardant 50 - 2 Pin MS 54 - M12		Mounting Threads 02 - 1/4-28" UNF Male 06 - M6 x 1mm Male 08 - M8 x 1.25mm Male				



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS279.4

