


HS-CE Connection Enclosure

Polycarbonate

Key Features

- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via multiple connectors

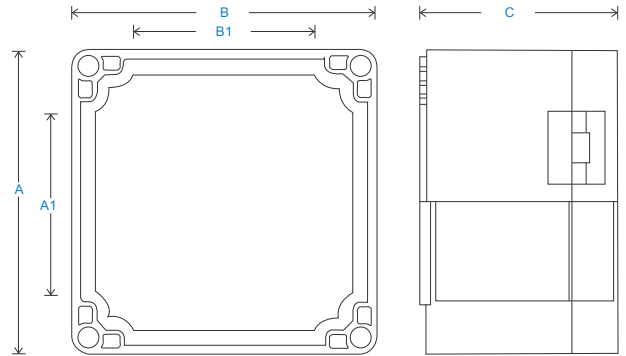

Technical Performance

| | | | |
|----------------|-------------------------------------------------------------------------|-----------|------------------------------------------------------------------------------------------------------------|
| Inputs | Via accelerometer | Door | Catches |
| Output | BNC as standard (alternatives can be specified in 'How To Order' table) | Glanding | Glands supplied but not fitted |
| Mounting Board | Engraved traffolyte panel (customisable upon request) | | Holes are punched for: Single input M12 - ø3.5-7mm cable Single input M20 - ø7-13mm multi-core cable |
| Material | Polycarbonate (to be specified in options of 'How To Order' table) | Labelling | Multi input M20 - 3 x ø5.3mm Channel locations - other |
| Dimensions | see: 'How To Order' table | Mounting | labelling available upon request |
| Sealing | IP66 | | supplied are 4 x Brackets |
| Termination | Klippon Type | | |

How To Order

