

HS-CA001 Charge Amplifier


Velocity output

Key Features

- Inline

Industries

Test and Measurement,
High Temperature

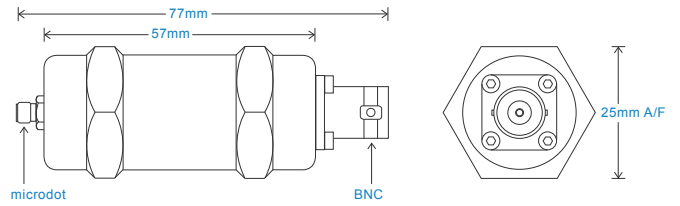

Technical Performance

Sensitivity	1pc/g = 0.67mV/mm/s Max output = 5V
Frequency Response	10Hz to 500Hz
Non-Linearity	<1%
Output	AC on a 12V bias level
Output Impedance	200 ohms

Mechanical

Case Material	Stainless Steel
Input Connector	Microdot
Output Connector	BNC Socket
Weight	100g (nominal)


Electrical

DC Supply	12-30 Volts DC
Current Range	0.5mA to 8mA
Settling Time	2 seconds

Environmental

Operating Temperature Range	-55 to 85°C
Sealing	IP65
EMC	EN61326-1:2013


Typical Frequency Response (at 100mV/g)

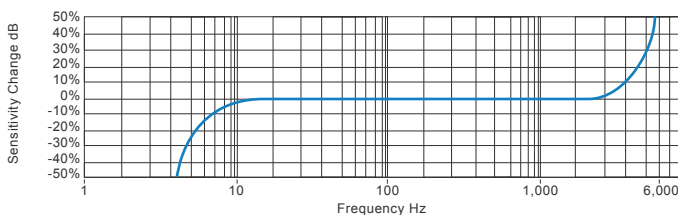

Applications

Feed Pumps, Boilers, Turbines
and Compressors

How To Order

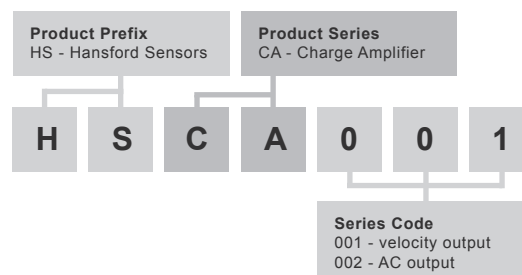

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice
TS407.1

