


HS-AM Magnets - Pole Piece







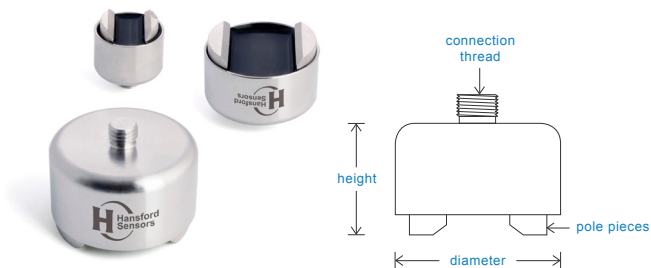






We manufacture a range of accessories for use with our comprehensive series of industrial accelerometers to achieve a secure surface fit.

Pole Piece Pot Magnets provide a secure, semi-permanent point of connection to a curved surface and all have an operating temperature range up to 120°C

| Part No. | Diameter | Thread | Pull Strength | Height |
|----------|----------|---------------------|---------------|--------|
| HS-AM020 | 20mm | 1/4"-28 UNF Male | 8.5kg | 17mm |
| HS-AM001 | 25mm | 1/4"-28 UNF Male | 18kg | 17mm |
| HS-AM002 | 25mm | M6 Male | 18kg | 17mm |
| HS-AM003 | 25mm | M8 Male | 18kg | 17mm |
| HS-AM004 | 25mm | 10-32 UNF Male | 18kg | 17mm |
| HS-AM026 | 25mm | 1/2" UNC Q-Fit Male | 18kg | 21mm |
| HS-AM005 | 25mm | Q-Fit Male | 18kg | 23mm |
| HS-AM010 | 25mm | M5 Female | 18kg | 23mm |
| HS-AM011 | 25mm | M6 Female | 18kg | 23mm |
| HS-AM012 | 25mm | 1/4"-28 UNF Female | 18kg | 23mm |
| HS-AM013 | 25mm | M8 Female | 18kg | 23mm |

HS-AM Magnets - Pole Piece

| Part No. | Diameter | Thread | Pull Strength | Height | |
|----------|----------|--------------------|---------------|--------|---|
| HS-AM018 | 32mm | 1/4"-28 UNF Male | 20kg | 20mm |  |
| HS-AM036 | 32mm | M6 Male | 20kg | 20mm |  |
| HS-AM037 | 32mm | M8 Male | 20kg | 20mm |  |
| HS-AM041 | 32mm | M6 Female | 20kg | 26mm |  |
| HS-AM040 | 32mm | M8 Female | 20kg | 26mm |  |
| HS-AM035 | 32mm | 1/4"-28 UNF Female | 20kg | 26mm |  |
| HS-AM039 | 35mm | 1/4"-28 UNF Male | 35kg | 33mm |  |
| HS-AM042 | 35mm | M5 Female | 35kg | 33mm |  |
| HS-AM043 | 35mm | M6 Female | 35kg | 33mm |  |
| HS-AM038 | 35mm | 1/4"-28 UNF Female | 35kg | 33mm |  |
| HS-AM044 | 35mm | M8 Female | 35kg | 33mm |  |