


# HS-AM Magnets - Flat Face







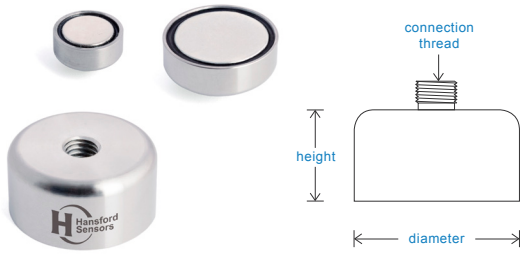



We manufacture a range of accessories for use with our comprehensive series of industrial accelerometers to achieve a secure surface fit.

Flat Face Pot Magnets provide a secure, semi-permanent point of connection to a flat surface and all have a constant operating temperature range up to 248°F.

Part No.	Diameter	Thread	Pull Strength	Height	
HS-AM027	0.8in	1/4"-28 UNF Male	26lbs	0.3in	
HS-AM028	0.8in	M6 Male	26lbs	0.3in	
HS-AM029	0.8in	M8 Male	26lbs	0.3in	
HS-AM030	0.8in	10-32 UNF Male	26lbs	0.3in	
HS-AM009	1in	1/4"-28 UNF Male	30lbs	0.3in	
HS-AM006	1in	M6 Male	30lbs	0.3in	
HS-AM007	1in	M8 Male	30lbs	0.3in	
HS-AM024	1in	10-32 UNF Male	30lbs	0.3in	
HS-AM008	1in	Q-Fit Male	30lbs	0.6in	
HS-AM014	1in	1/4"-28 UNF Female	30lbs	0.6in	
HS-AM015	1in	M5 Female	30lbs	0.6in	

# HS-AM Magnets - Flat Face

Part No.	Diameter	Thread	Pull Strength	Height	
HS-AM016	1in	M6 Female	30lbs	0.6in	
HS-AM017	1in	M8 Female	30lbs	0.6in	
HS-AM031	1.2in	1/4"-28 UNF Male	55lbs	0.4in	
HS-AM032	1.2in	M6 Male	55lbs	0.4in	
HS-AM033	1.2in	M8 Male	55lbs	0.4in	
HS-AM034	1.2in	10-32 UNF Male	55lbs	0.4in	
HS-AM045	1.2in	1/4"-28 UNF Female	55lbs	0.6in	
HS-AM046	1.2in	M6 Female	55lbs	0.6in	
HS-AM047	1.2in	M8 Female	55lbs	0.6in	
HS-AM019	1.6in	1/4"-28 UNF Male	110lbs	0.4in	